

LED DRIVE TRANSFORMER

YLEDR2010/2610/2808/2810



1.FEATURES

- . Operating temperature : -25 °C to 105 °C.
- . Low distortion,Small size.
- . 100% lead (Pb) free meet RoHS Standard.

2.APPLICATIONS

LED DRIVE POWER SUPPLY

3.MECHANICAL DRAWING

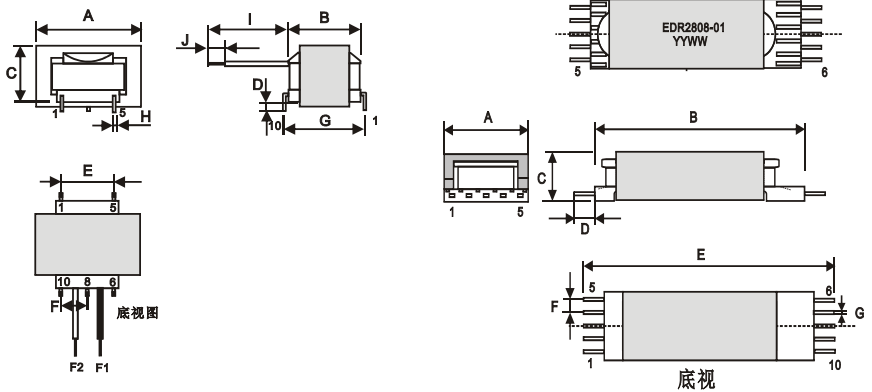

4.DINENSIONS (UNIT:mm)

No.	SERIES	A (MAX)	B (MAX)	C (MAX)		WATT
1	YLEDR2010-XXX	22.0	15.0	9.6		3-5W
2	YLEDR2610-XXX	14.0	37.5	12.0		20W
3	YLEDR2808-XXX	14.0	39.0	8.8		20W
4	YLEDR2810-XXX	16.0	41.0	11.5		30W

5.ELECTRICAL SPECIFICATION

Isolation:3750Vrms (WINGDING TO WINGDING)

Turns Ratio:EACH DESIGN

L Inductance:EACH DESIGN

福建省漳州市云霄县云陵镇享堂工业区
Industrial xiang tang yun xiao town zhangzhou city
fujian province

惠州市博罗县龙溪镇电子城路46号科瑞高新产业园
Kerui High-tech Industrial Park, No.46, Yuecheng Road, Longxi
Town, Boluo County, Huizhou city, Guangdong Province

TEL:0596-8523238 0596-8545556 FAX:0596-8523938

TEL:0752-6809969 0752-6676654 FAX:0752-6809939