


毅力电子有限公司 Y.L.ELECTRONICS CO.,LTD

SMD RF TRANSFORMERS


YLSBL202 SERIES

1.MECHANICAL DIMENSIONS (UNIT:mm)

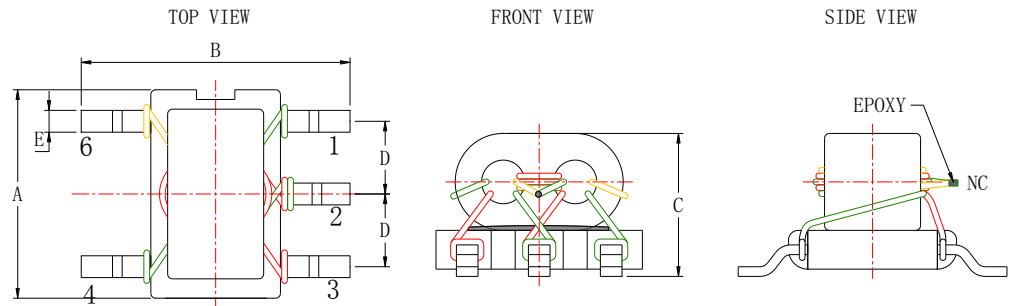


No.	A	B	C	D	E
1	4.50MAX.	5.40MAX.	3.50MAX.	1.50±0.10	0.50±0.15

2.RECOMMEND PAD LAYOUT

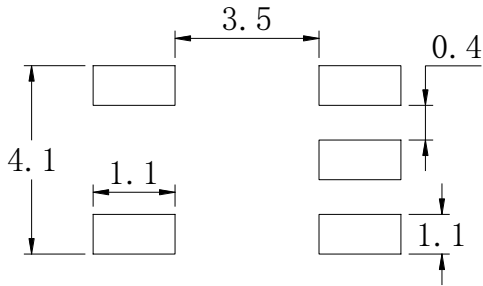

3.SCHEMATICS

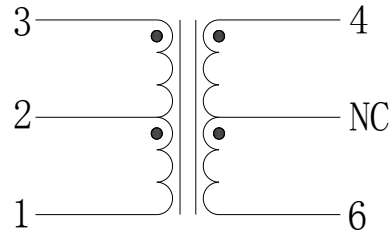

4.ELECTRICAL SPECIFICATION: $T_A=25^{\circ}\text{C}$, $Z_0=75\Omega$

Part Number	Turns Ratio	Frequency	Insertion Loss		
	1-2:2-3:4-NC:NC-6		5MHz~60MHz	60MHz~150MHz	150MHz~200MHz
YLSBL202-01	1:1:1:1±5%	5MHz~200MHz	0.5dB MAX.	0.8dB MAX.	1.1dB MAX.

SMD RF Transformer

Operating temperature range: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

Storage temperature range: $-55^{\circ}\text{C}\sim+125^{\circ}\text{C}$

Impedance=75Ω

RoHS compliant

福建省漳州市云霄县云陵镇亭堂工业区
Industrial xiang tang yun xiao town zhangzhou city fujian
province

惠州市博罗县龙溪镇电子城路46号科瑞高新产业园
Kerui High-tech Industrial Park, No.46, Yuecheng Road,
Longxi Town, Boluo County, Huizhou city, Guangdong
Province

TEL:0596-8523238 0596-8545556 FAX:0596-8523938

TEL:0752-6809969 0752-6676654 FAX:0752-6809939