

COMMON MODE FILTERS


YLT1065-XXX

1.APPLICATIONS

- . Driver transformer
- . Automotive products
- . 100% lead (Pb) free meet RoHS Standard.

2.MECHANICAL DRAWING

UNIT:mm

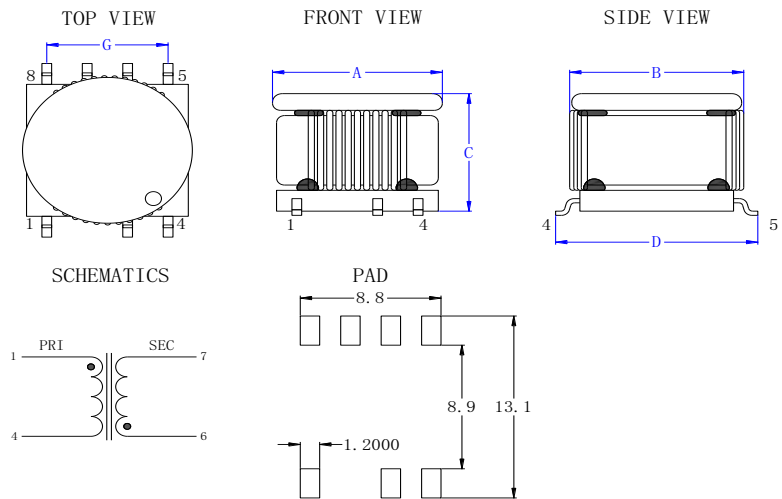

3.DINENSIONS (UNIT:mm)

No.	PART NO.	A (MAX)	B (MAX)	C (MAX)	D (±0.5)	G (±0.3)
1	YLT1065-208	12.5	14.0	12.0	12.5	7.5
2	YLT1065-2111	12.5	14.0	12.0	12.5	7.5

4.ELECTRICAL SPECIFICATION

No.	PART NO.	L (uH) MIN.	HI-POT	TEST CONDITION	DCR (Ω) MAX.	RATED CURRENT (A)
1	YLT1065-208	90.0	3000VAC	100KHZ 1V	0.04	1.80 MAX.
2	YLT1065-2111	50.0	2500VAC	100KHZ 1V	0.06	1.45 MAX.

Packaging quantity: 300pcs/Reel,600pcs/Box,2400pcs/Carton.

Temperature Rise: ≤40°C

Operating Temperature:-20°C to 125°C

Unspecified values available on request.

福建省漳州市云霄县云陵镇享堂工业区
Industrial xiang tang yun xiao town zhangzhou city fujian
province

惠州市博罗县龙溪镇电子城路46号科瑞高新产业园
Kerui High-tech Industrial Park, No.46, Yuecheng
Road, Longxi Town, Boluo County, Huizhou city,
Guangdong Province

TEL:0596-8523238 0596-8545556 FAX:0596-8523938

TEL:0752-6809969 0752-6676654 FAX:0752-6809939